



PANINI

ENGLISH 

**INCLUDES
PRE-HEATER**



3-PASS STEAM BOILER



COVAP-R

WITH HEAT RECYCLING SYSTEM

CHARACTERISTICS

Steam boiler with 3-pass fire tubes and integrated heat-recycling system that preheats the air using the recycled heat from combustion.

- Integrated heat recovery system to preheat carburant air using waste heat
- Control panel with LCD display for Alarms:
 - Excess water hardness
 - High stack temperature
 - High pressure
 - Low water level
- Controls the following optional accessories:
 - O₂, CO₂
 - Constant yield
 - Constant water level control system
 - Automatic blowdown and Salinity Control
 - Steam, water and gas flow metering
- Working pressure of 12, 15 or 18 bar

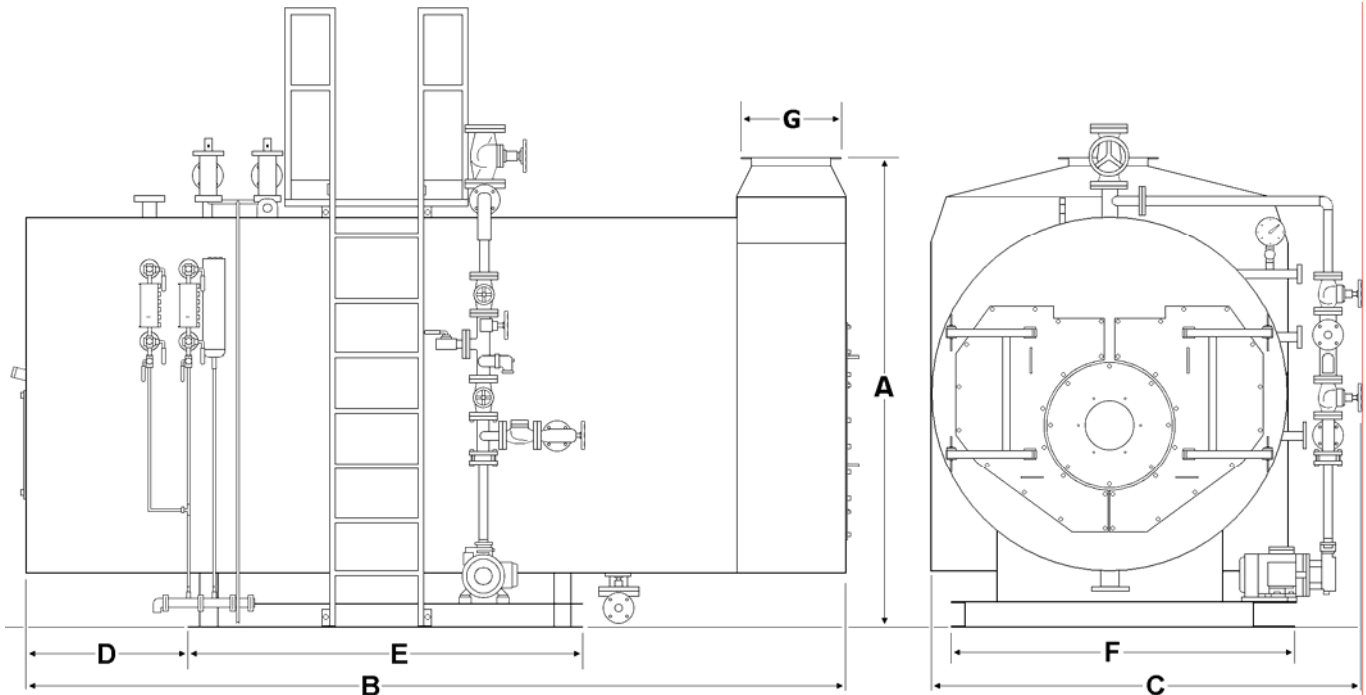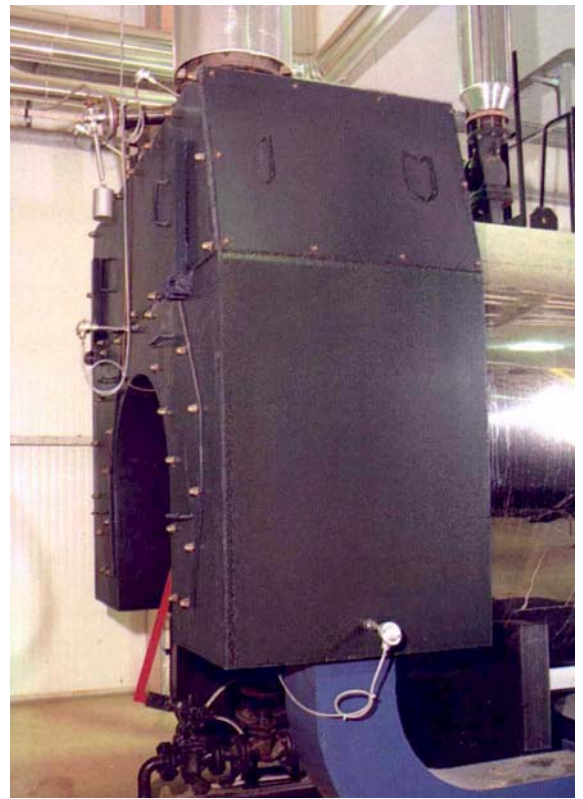

MODEL	STEAM Kg/h	POWER ¹ Kw	DIMENSIONS mm				CAPACITY liters		WEIGHT Kg
			A	B	C	D	TOTAL	WORKING	
Ecovap/R 4	4.000	2.790		5050	2450	830	8.610	7.850	10.900
Ecovap/R 5	5.000	3.488	3100	5370	2600	830	9.700	7.850	12.960
Ecovap/R 6	6.000	4.186		5370	3060		11.600	10.130	24.200
Ecovap/R 8	8.000	5.581	3420	6500	3060	930	15.750	12.500	25.700
Ecovap/R 10	10.000	6.976		6700	3200		18.000	16.000	29.200
Ecovap/R 12	12.000	8.720		7200	3200		22.000	18.000	31.500
Ecovap/R 15	15.000	10.465		7200	3500		24.000	19.000	34.500
Ecovap/R 20	20.000	13.953		8000	3950		30.000	28.000	42.500

1) The declared power is calculated based on a standard feed water temperature of 90°C.
Note: The data indicated in the table are subject to change.