



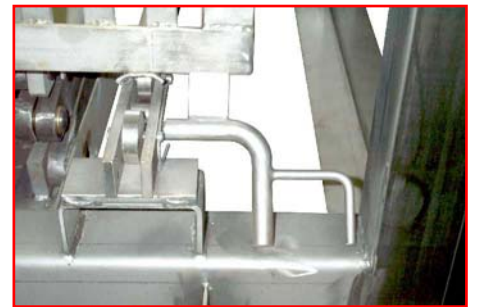

PANINI

ENGLISH 

**FOR ALL
CONTAINERS**

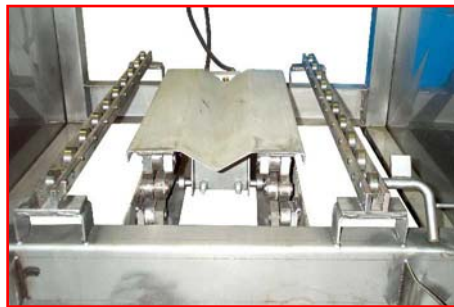

CMN **MANUAL CRATER** WITH HYDRAULIC LIFT

DESCRIPTION


Basic crater to facilitate manual crate filling. The operator works at waist-level to eliminate repetitive bending and increase filling speed. Compared to jumble-stacking, layered stacking increases crate capacity by up to 20%.

CHARACTERISTICS


- Accepts any type of container
- Up to 2 layers per minute with 2 trained workers
- For rectangular Layer-in-Divider crates with false bottom
- Lifting jack driven by hydraulic cylinder
- Manual divider placement
- Manual layer formation
- Built in stainless steel AISI 304
- Accepts standard-size Panini crates for diameter 1200–1400 static retorts and diameter 1200–1800 rotary retorts.
- Optional rectangular or rotary receiving table, or receiving belt in steel mesh with gear reducer for speed setting

OPERATION

1. Cans arrive from the line and accumulate on a receiving table (not included in supply), at the same height as the crater.
2. The worker lays the divider by hand and actuates the lift to bring the layer even with the tabletop.
3. The worker takes the cans by hand and arranges them on the divider, always working at waist-height to avoid bending.
4. The worker repeats the procedure until the crate is full, removes the full crate manually, inserts an empty crate and repeats.

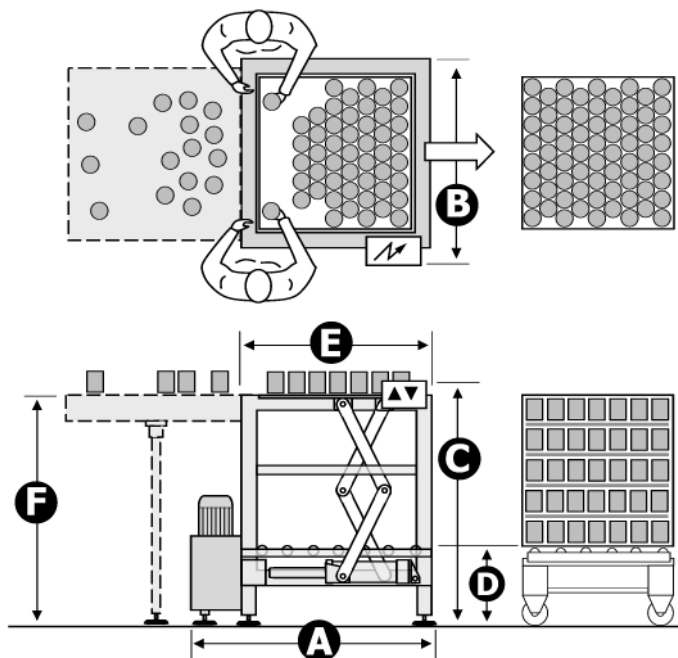

CRATE mm	MIN	MAX
Length	950	950
Width	820	920
Height	780	920

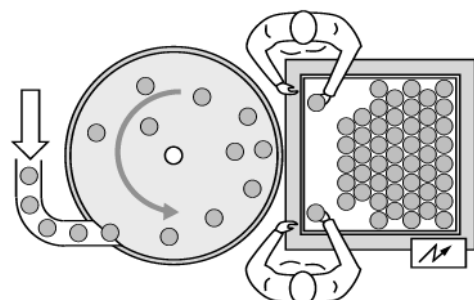

OPTIONAL ROTARY RECEIVING TABLE

MODEL	DIMENSIONI mm						PESO Kg	ELETT. kW
	A	B	C	D	E	F		
CMN 1214	1560	1240	1480	507-532	1160	1480	900	1,5

Note: The data indicated in the table are subject to change.



STEAM BOILERS — STEAM JACKETED KETTLES
 STERILIZATION RETORTS — COMPOSITE FIBRE AUTOCLAVES
 Via Taruffi, 70 — 41053 Maranello (MO)
 Tel. +390 536 940707 Fax. +390 536 943705

info@op-panini.it

www.op-panini.eu